


Hydrogen Safety Sensor

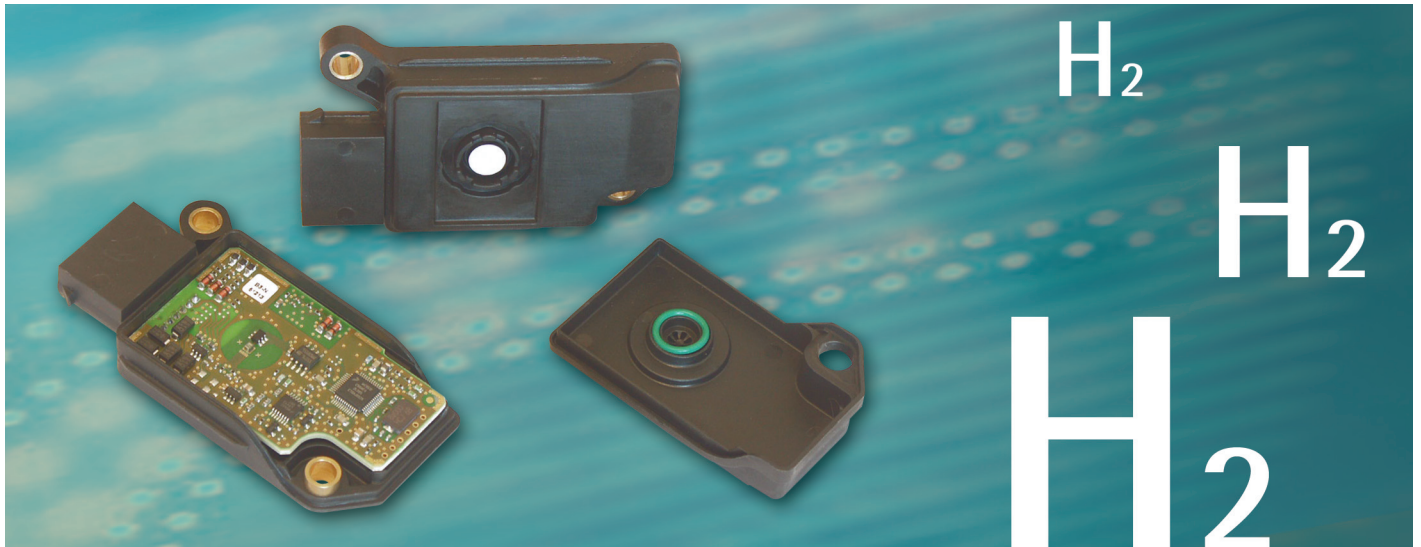

HSS-440

Fast and flexible

The AppliedSensor HSS-440 Hydrogen Safety Sensor is a highly selective, fast-responding sensor that enables the safe use of hydrogen gas. Based on advancements in Field Effect (FE) technology, the HSS-440 Hydrogen Safety Sensor offers reduced power consumption and increased packaging flexibility.

The HSS-440 is suitable for automotive hydrogen safety applications and offers CAN bus electrical interface with standard MQS six-pin connector. Self testing at start-up together with error handling assures high safety integrity during operation. Short start-up time enables intermitted mode of operation to minimize current drain.

Highly sensitive and selective

The HSS-440 incorporates a field-effect transistor with a catalytic metal gate stack as the gas-sensing layer. Hydrogen molecules interact with the gate thereby changing characteristics of the transistor. The sensor is fed by a constant current source and gives a voltage output proportional to the logarithm of the hydrogen concentration in the ambient.

AppliedSensor's unique design and careful processing of the gate stack result in superior sensor properties including high speed of response and excellent selectivity as well as a detection range that covers the lower explosion limit of hydrogen gas.

Low cross sensitivity

Unlike sensors that have severe cross sensitivity to a variety of combustible gases, AppliedSensor's FE technology ensures that the HSS-440 Hydrogen Safety Sensor is highly selective to hydrogen gas without interference from background gases or water vapor.

Key Benefits

- High sensitivity to hydrogen gas
- Low cross sensitivity
- Fast response time
- Low power consumption
- Long term stability and reliability
- Long lifetime

Applications

- Detection of hydrogen gas leaks in automotive cabin ceiling, under the hood of the engine compartment or beneath the trunk lid of hydrogen-powered vehicles
- Detection of hydrogen gas in and around hydrogen fueling stations

Hydrogen Safety Sensor

HSS-440 Specifications

Target gas	Hydrogen
Concentration range	0-4.4% H ₂ in air
Accuracy	+/- 3000ppm
Speed of response (t ₉₀)	<3s
Speed of recovery	<10s
Cross-sensitivity	No detection towards HC, H ₂ S, N ₂ , CO, CO ₂ , NO _x , H ₂ O Humidity influence, not detectable
Start-up time	500 ms
Self test/Error handling	Developed in accordance to IEC 61508 (SIL2)

Electrical

Supply voltage	8.5-18.5V
Supply current	75mA typical
Can Interface	Version 2.0 ISO 11898
Programmable CAN ID	Yes
Connector	MQS 6-pin
ESD/Reverse polarity	Yes

Environmental

Operation temperature range	-40 -> +125° C
Storage temperature range	-50 -> +125° C
Humidity	5-95% including condensation
Pressure	70-130 kPa
EMC	Automotive
ATEX	Zone 2
Shock	Automotive
Vibration	Automotive

Mechanical

Dimensions (LxWxH)	85 x 45 x 15mm
Weight	40g
Material	PBT +30% GF
Gas filter membrane	Pall SUPOR 450R, 0.45 µm
IP code	IP67

All data subject to change without notice. Copyright © 2007 AppliedSensor GmbH

AppliedSensor AB
Teknikringen 6
SE-583 30 Linköping, Sweden
Tel: +46 13 26 29 00
Fax: +46 13 26 29 29

AppliedSensor GmbH
Gerhard-Kindler-Str. 8
72770 Reutlingen, Germany
Tel: +49-7121-51486-0
Fax: +49-7121-51486-29

AppliedSensor Inc.
53 Mountain Boulevard
Warren, NJ 07059, USA
Tel: +1 (908) 222-1477
Fax: +1 (908) 222-1478



info@appliedsensor.com www.appliedsensor.com